


PS 58U PS 59U

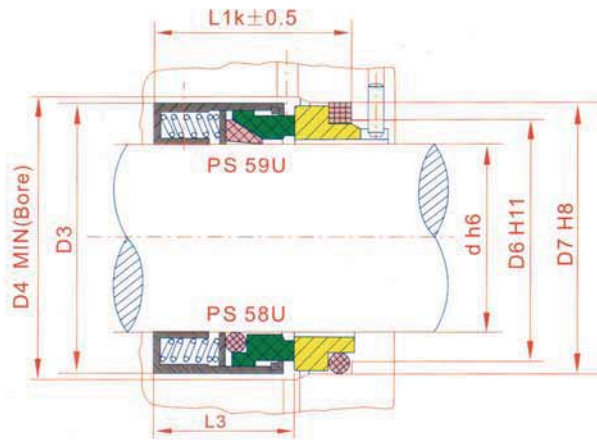

Operating Limits:

Pressure: $\leq 1.7\text{MPa}$

Speed: $\leq 25\text{m/s}$

Temperature: $-20\text{ }^{\circ}\text{C} \sim +200\text{ }^{\circ}\text{C}$

Design Features:

Conform to ISO3069, DIN24960 and BS5257-1975 standards

- Stationary Ring(SIC/TC/Ceramic)
- Rotary Ring (Carbon/SIC/TC)
- Secondary Seal(VITON/PTFE/PTFE+VITON)
- Spring & Other Parts (SUS304/SUS316)

Seal size d(mm)	D3	D4	L1k	L3	D6	D7
14	24	26	35.0	23.0	21	25
16	26	28	35.0	23.0	23	27
18	32	34	37.5	24.0	27	33
20	34	36	37.5	24.0	29	35
22	36	38	37.5	24.0	31	37
24	38	40	40.0	26.7	33	39
25	39	41	40.0	27.0	34	40
28	42	44	42.5	30.0	37	43
30	44	46	42.5	30.5	39	45
32	46	48	42.5	30.5	42	48
33	47	49	42.5	30.5	42	48
35	49	51	42.5	30.5	44	50
38	54	58	45.0	32.0	49	56
40	56	60	45.0	32.0	51	58
43	59	63	45.0	32.0	54	61
45	61	65	45.0	32.0	56	63
48	64	68	45.0	32.0	59	66
50	66	70	47.5	34.0	62	70
53	69	73	47.5	34.0	65	73
55	71	75	47.5	34.0	67	75
58	78	83	52.5	39.0	70	78
60	80	85	52.5	39.0	72	80
63	83	88	52.5	39.0	75	83
65	85	90	52.5	39.0	77	85
68	88	93	52.5	39.0	81	90
70	90	95	60.0	45.5	83	92
75	95	104	60.0	45.5	88	97
80	104	109	60.0	45.0	95	105
85	109	114	60.0	45.0	100	110
90	114	119	65.0	50.0	105	115
95	119	124	65.0	50.0	110	120
100	124	129	65.0	50.0	115	125

דוגמים PS58U + PS59U תואמים 58U + 59U J.C.