

# PS HJ



## Operating Limits:

Pressure:  $\leq 2.5\text{MPa}$


Speed:  $\leq 20\text{m/s}$

Temperature:  $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$

## Design Features:

- a. Single face, balanced.
- b. Conform to the DIN24960 and GB6556 standards.
- c. Equivalent to Burgmann HJ92N

Medium: Liquid rich in solid impurity or high viscosity, such as refine sugar, sewage and paper industry.

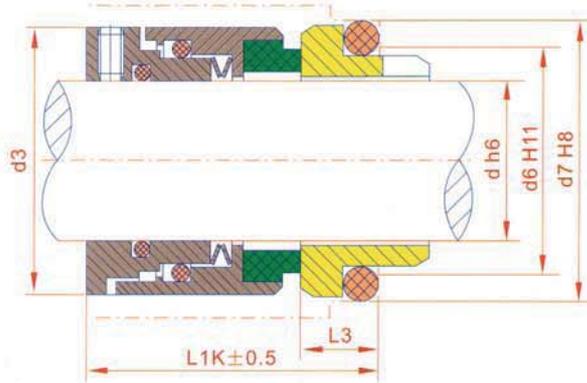

Seal size d(mm)	d3	d6	d7	L3	L1k
18	32	27	33	15	37.5
20	34	29	35	15	37.5
22	36	31	37	15	37.5
24	38	33	39	15	40.0
25	39	34	40	15	40.0
28	42	37	43	15	42.5
30	44	39	45	15	42.5
32	47	42	48	15	42.5
33	47	42	48	15	42.5
35	49	44	50	15	42.5
38	54	49	56	16	45.0
40	56	51	58	16	45.0
43	59	54	61	16	45.0
45	61	56	63	16	45.0
48	64	59	66	16	45.0
50	66	62	70	17	47.5
53	69	65	73	17	47.5
55	71	67	75	17	47.5
58	78	70	78	18	52.5
60	80	72	80	18	52.5
63	83	75	83	18	52.5
65	85	77	85	18	52.5
68	88	81	90	18.5	52.5
70	90	83	92	19	60.0
75	99	88	97	19	60.0
80	104	95	105	19	60.0
85	109	100	110	19	60.0
90	114	105	115	20.5	65.0
95	119	110	120	20.5	65.0
100	124	115	125	20.5	65.0