


# PS13

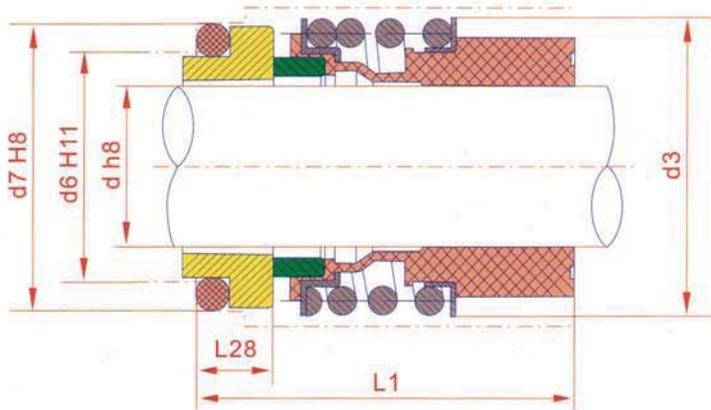

Stationary Ring (Ceramic/SiC/TC)

Rotary Ring (Carbon/SiC)

Retainer (SUS304/SUS316)

Spring (SUS304/SUS316)

Spring Holder (SUS304/SUS316)

Bellows (NBR/EPDM/VITON)

O-Ring (NBR/EPDM/VITON)

Operating Limits:

Pressure:  $\leq 1.2\text{MPa}$

Speed:  $\leq 10\text{ m/s}$

Temperature:  $-20^{\circ}\text{C} \sim +120^{\circ}\text{C}$

Seal size d (mm)	d3	d6	d7	L1	L28
24	42.5	33	39	50	7.5
25	42.5	34	40	50	7.5
28	49.0	37	43	50	7.5
30	49.0	39	45	50	7.5
32	53.5	42	48	55	7.5
35	57.0	44	50	55	7.5
38	59.0	49	56	55	9
40	62.0	51	58	55	9