


PS166

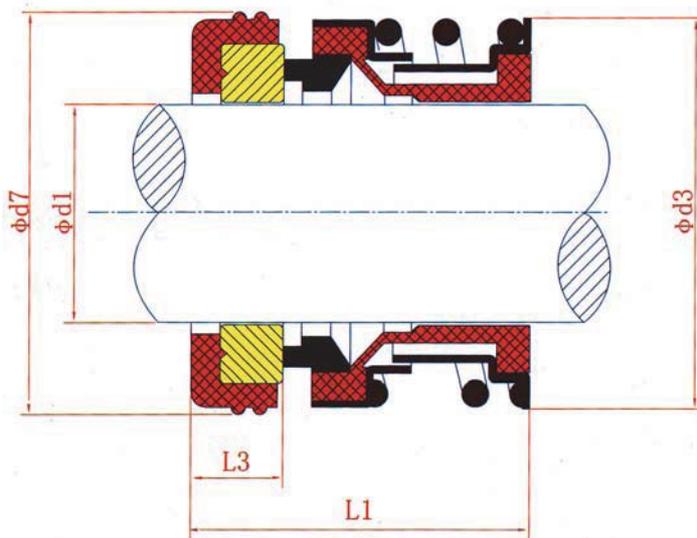

- Stationary Ring (Ceramic/SiC/TC)
- Rotary Ring (Plastic Carbon/Carbon/ SiC/TC)
- Secondary Seal (NBR/ EPDM/VITON)
- Spring & Other Parts (SUS304/SUS316)

Operating Limits:
 Pressure: $\leq 1\text{MPa}$
 Speed: $\leq 10\text{ m/s}$
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Model	d1	d3	d7	L1	L3
PS166-3/8"	9.525	23.29	22.225	23.8	7.14
PS166-1/2"	12.7	23.29	25.4	23.01	6.35
PS166-5/8"	15.875	30.1	31.75	28.55	10.31
PS166-3/4"	19.05	33.07	34.925	28.55	10.31
PS166-7/8"	22.225	36.3	38.1	30.94	10.31
PS166-1"	25.4	39.42	41.275	31.72	11.1