


PS210

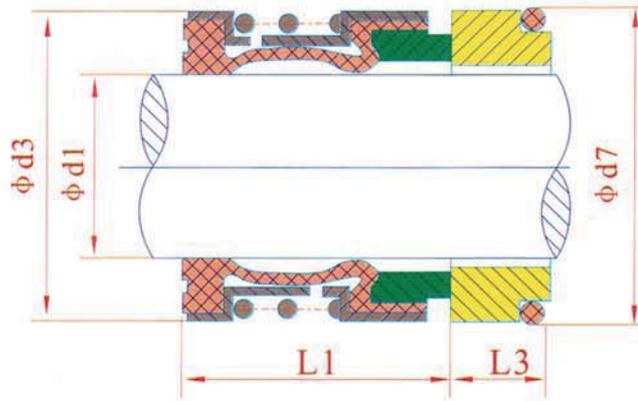

- Stationary Ring (Ceramic/SIC/TC)
- Rotary Ring (Carbon/ SIC/TC)
- Secondary Seal (NBR/ EPDM/VITON)
- Spring & Other Parts (SUS304/SUS316)

Operating Limits:
 Pressure: $\leq 1.2\text{MPa}$
 Speed: $\leq 10\text{m/s}$
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Model	d1	d3	d7	L1	L3
PS 210-16	16	26	27	15	12
PS 210-18	18	32	33	20	13.5
PS 210-20	20	34	35	20	13.5
PS 210-22	22	36	37	20	13.5
PS 210-24	24	38	39	20	13.3
PS 210-25	25	39	40	20	13
PS 210-28	28	42	43	26	12.5
PS 210-30	30	44	45	26	12
PS 210-32	32	46	48	26	12
PS 210-33	33	47	48	26	12
PS 210-35	35	49	50	26	12
PS 210-38	38	54	56	30	13
PS 210-40	40	56	58	30	13
PS 210-43	43	59	61	30	13
PS 210-45	45	61	63	30	13
PS 210-48	48	64	66	30	13
PS 210-50	50	66	70	30	13.5
PS 210-53	53	69	73	30	13.5
PS 210-55	55	71	75	30	13.5
PS 210-60	60	80	80	33	13.5
PS 210-65	65	85	85	33	13.5
PS 210-70	70	90	92	33	14.5
PS 210-75	75	99	97	40	14.5

תואם מיידות J.C. 2100