


PS 502

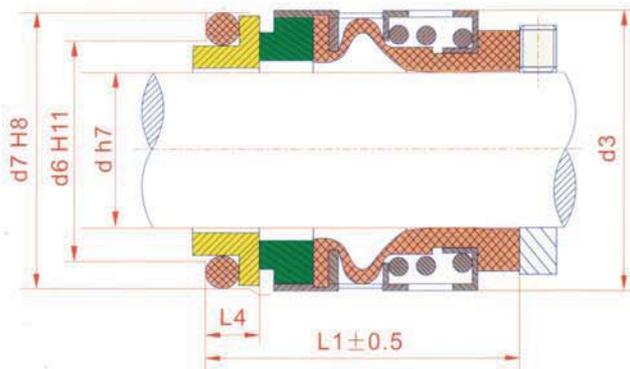

Stationary Ring (Ceramic/SiC/TC)

Rotary Ring (Carbon/SiC/TC)

Secondary Seal(VITON/PTFE+VITON)

Spring & Other Parts (SUS304/SUS316)

Operating Limits:

Pressure: $\leq 4\text{MPa}$

Speed: $\leq 13\text{m/s}$

Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Seal size d (mm)	d3	d6	d7	L1	L4
14	24	21	25	35	12
16	26	23	27	35	12
18	32	27	33	37.5	13.5
20	34	29	35	37.5	13.5
22	36	31	37	37.5	13.5
24	38	33	39	40	13.3
25	39	34	40	40	13
28	42	37	43	42.5	12.5
30	44	39	45	42.5	12
32	46	42	48	42.5	12
35	49	44	50	42.5	12
38	54	49	56	45	13
40	56	51	58	45	13
45	61	56	63	45	13
50	66	62	70	47.5	13.5
55	71	67	75	47.5	13.5
60	80	72	80	52.5	13.5
70	89	83	92	60	14.5
80	104	95	105	60	15