


PS52

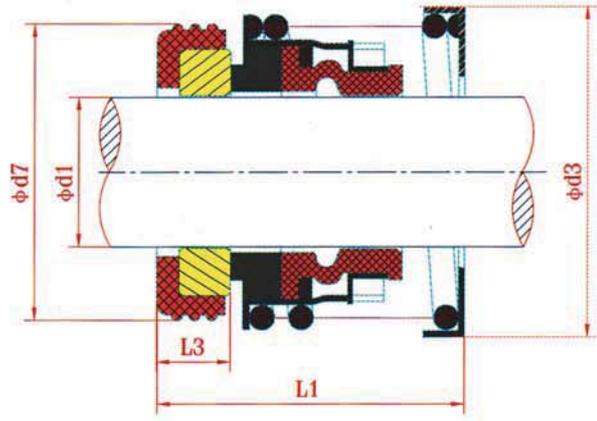

- Stationary Ring (Ceramic/SIC/TC)
- Rotary Ring (Carbon/ SIC/TC)
- Secondary Seal (NBR/ EPDM/VITON)
- Spring & Other Parts (SUS304/SUS316)

Operating Limits:
 Pressure: $\leq 2.8\text{MPa}$
 Speed: $\leq 13\text{ m/s}$
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Model	d1	d3	d7	L1	L3
PS52 -3/8"	9.525	28.0	24.600	33.7	8.7
PS52 -1/2"	12.700	32.0	27.800	33.7	8.7
PS52 -5/8"	15.875	35.0	30.950	35.3	10.3
PS52 -3/4"	19.050	40.0	34.150	35.3	10.3
PS52 -7/8"	22.225	43.0	37.300	35.3	10.3
PS52 -1"	25.400	47.0	40.500	36.9	11.9
PS52 -1 1/8"	28.575	56.0	47.650	44.9	11.9
PS52 -1 1/4"	31.750	59.0	50.800	44.9	11.9
PS52 -1 3/8"	34.925	63.0	54.000	44.9	11.9
PS52 -1 1/2"	38.100	67.0	57.150	44.9	11.9
PS52 -1 5/8"	41.275	71.0	60.350	44.9	11.9
PS52 -1 3/4"	44.450	74.0	63.500	52.9	11.9
PS52 -1 7/8"	47.625	77.0	66.700	52.9	11.9
PS52 -2"	50.800	81.0	69.850	54.5	13.5
PS52 -2 1/8"	53.970	84.0	73.050	54.5	13.5
PS52 -2 1/4"	57.150	88.0	76.200	54.5	13.5
PS52 -2 3/8"	60.320	91.0	79.400	54.5	13.5
PS52 -2 1/2"	63.500	94.0	82.550	54.5	13.5