


PS H7N PS H75

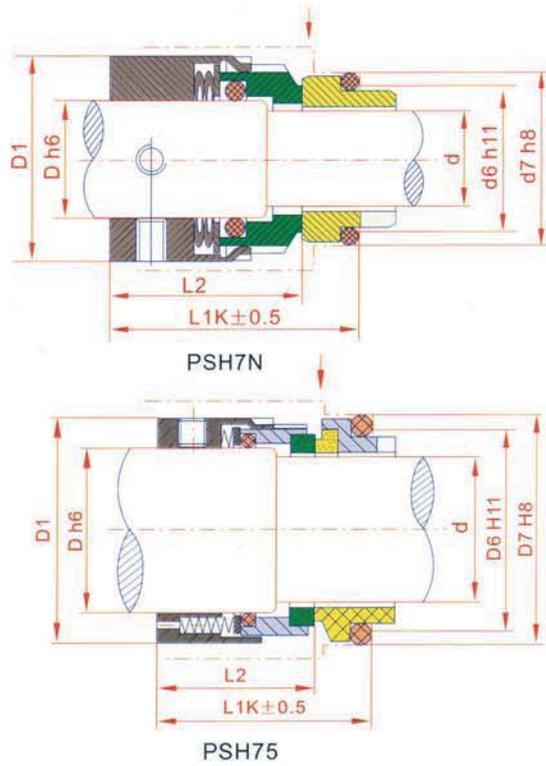

Operating Limits:

Pressure: $\leq 2.5\text{MPa}$

Speed: $\leq 20\text{m/s}$

Temperature: $-20^{\circ}\text{C} \sim +220^{\circ}\text{C}$

Design Features:

- PS H7N Wave Spring , PS H75 Multiple Spring
- Conform to ISO3069, DIN24960 and GB6556 standards.
- Balanced mechanical seal

Seal size d(mm)	D	D1	D6	D7	L2	L1K
25	30	45	34	40	36.0	47.5
28	33	48	37	43	38.5	50.0
30	35	50	39	45	38.5	50.0
33	38	55	42	48	38.5	50.0
35	40	57	44	50	38.5	50.0
38	43	60	49	56	38.5	52.5
40	45	62	51	58	38.5	52.5
43	48	65	54	61	38.5	52.5
45	50	67	56	63	38.5	52.5
48	53	70	59	66	38.5	52.5
50	55	72	62	70	42.5	57.5
53	58	79	65	73	42.5	57.5
55	60	81	67	75	42.5	57.5
60	65	86	72	80	47.5	62.5
65	70	91	77	85	47.5	62.5
70	75	99	83	92	52	70.0
75	80	104	88	97	52	70.0
80	85	109	95	105	51.8	70.0
85	90	114	100	110	56.8	75.0
90	95	119	105	115	56.8	75.0
95	100	124	110	120	57.8	75.0