


PS606

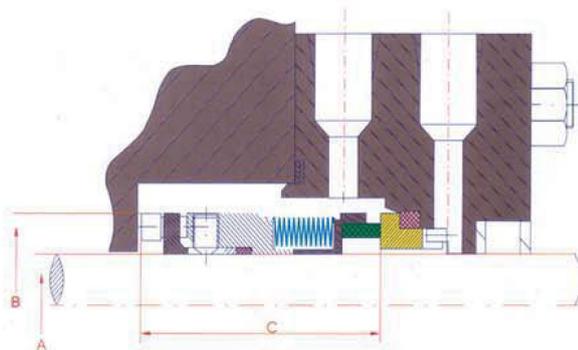

Stationary Ring (SiC/TC)

Rotary Ring (Carbon/SiC/TC)

Secondary Seal(Flexible Carbon)

Metal Bellows (AM-350/Inconel 718)

Other Parts (300 Series Stainless Steel)

Operating Limits:

Pressure: $\leq 2\text{MPa}/6.9\text{MPa}$ (Double-ply)

Speed: $\leq 25\text{m/s}$

Temperature: $-75\text{ }^{\circ}\text{C} \sim +425\text{ }^{\circ}\text{C}$

Seal size (Inches)	A	B	C
0.750	0.750	1.625	2.312
0.875	0.875	1.750	2.343
1.000	1.000	1.875	2.343
1.125	1.125	2.000	2.375
1.250	1.250	2.125	2.375
1.375	1.375	2.250	2.468
1.500	1.500	2.375	2.500
1.625	1.625	2.500	2.500
1.750	1.750	2.625	2.531
1.875	1.875	2.750	2.531
2.000	2.000	2.875	2.562
2.125	2.125	3.000	2.562
2.250	2.250	3.250	2.750
2.375	2.375	3.375	2.781
2.500	2.500	3.500	2.781
2.625	2.625	3.687	2.875
2.750	2.750	3.812	3.000
2.875	2.875	4.000	3.000
3.000	3.000	4.125	3.000
3.125	3.125	4.250	3.000
3.250	3.250	4.375	3.000
3.375	3.375	4.500	3.000
3.500	3.500	4.625	3.000
3.625	3.625	4.750	3.000
3.750	3.750	4.875	3.000

Seal size (mm)	A	B	C
20	20	41.28	58.72
22	22	44.45	59.51
25	25	47.63	59.51
30	30	50.80	60.33
32	32	53.98	60.33
35	35	57.15	62.69
38	38	60.33	63.50
40	40	63.50	63.50
45	45	66.68	64.29
48	48	69.85	64.29
50	50	73.03	65.07
55	55	76.20	65.07
60	60	85.73	70.64
65	65	88.90	70.64
70	70	96.82	76.20
75	75	104.78	76.20
80	80	107.95	76.20
85	85	114.30	76.20
90	90	117.48	76.20
95	95	123.83	76.20
100	100	130.18	76.20