
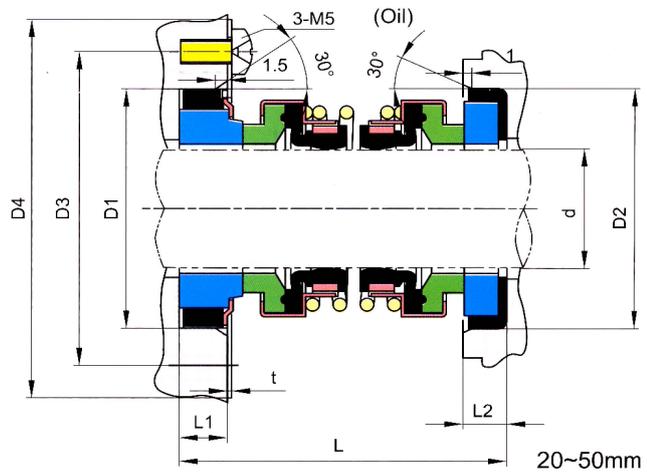


PS 56D

Elastomer Bellow Mechanical Seals

- (Operating Conditions)
 (Temperature) : $\leq 80^{\circ}\text{C}$
 (Pressure) : $\leq 0.5\text{MPa}$
 (Speed) : $\leq 10\text{m/s}$
- (Materials)
 (Stationary Ring) : Q1,Q2,U2
 (Stationary Ring on Atmosphere side) : V1
 (Rotary Ring) : Q1,Q2,U2
 (Rotary Ring on Atmosphere side) : B
 (Secondary Seal) : P
 (Spring and Metal Parts) : F
- Applications: Clean water, sewage water, oil and other weakly corrosive fluids.

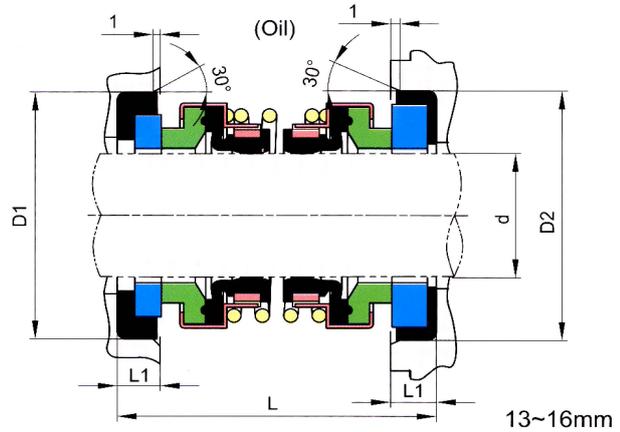

Size Metric)	d	D1	D2	D3	D4	L	L1	L2	t
13	13	25	25	-	-	36	5	-	-
14	14	30	30	-	-	36	5	-	-
15	15	30	30	-	-	36	5	-	-
16	16	30	30	-	-	36	5	-	-
20	20	44	38	60	72	49	7	7	1
25	25	50	44	60	72	51	7	7	1
30	30	57	54/44	70	82	59	9	8	1
35	35	64/57	58/54	80	94	61	9	9	1.2
40	40	70	64/68	85	100	64.5	11	9	1.2
45	45	70	66/68	90	105	65	10	9	1.2
50	50	80	72	95	109	69.5	10	9	1.2